

05-9813-34-CL


V1

POWELL Spotlight

**Description**

LED Spotlight for outdoor use.

With adjustable lighting positioning. Includes drainage holes on the front of the head to avoid water accumulation and maximise the light's useful life. Structure with double body design to prevent heat generated by the LED affecting the useful life of the driver. Adjustable light source. Structure material: High purity aluminium. Structure finish: Grey. Diffuser material: Glass. Diffuser finish: Transparent. UV protection. Warranty: 5 Years.

**Finish**

Grey
Transparent

Material

High purity aluminium
Glass

**TECHNICAL CHARACTERISTICS****Light source**

Light source: LED CREE
Output (W): 6W
Total power consumption (W): 9.2
Color temperature: Warm White - 3000K
CRI: 80
Real Lumen: 607
Nominal Lumen: 669
Qty Leds: 3
Lm/Real W: 66
Life Time: 50.000h L70B30
Bin / Grup: 7C1 o 7B4
MacAdam steps: 2
UGR: 8.5
Photobiological risk: RG2

GEAR

Brand: EAGLERISE
Gear included: Yes, electronic
Voltage / Frequency:
100-240VAC/50-60Hz
Power Factor: 0.40

Luminaire

Double cable exit: No
Drainage: No
Uv Protection: Yes
Warranty: 5 Years

Logistics

Energy Efficiency: LED A++
EAN Code: 8435381458812
Net Weight (Kg): 0.895
Weight in Kg (packaged): 1.112
Packing: 140 x 125 x 190
Masterbox: 6


The photograph may not match the reference exactly. Please read the product description to identify the finish.

OPTIONAL ACCESSORIES




71-9487-34-34V1


Structure material: Galvanized steel
Net Weight (Kg): 0.790

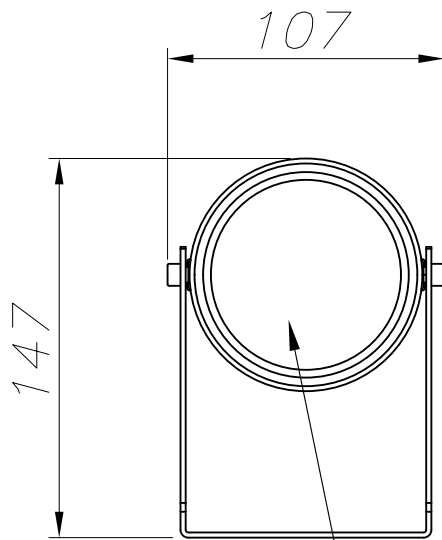


CRISTAL TRANSPARENTE
TRANSPARENT GLASS

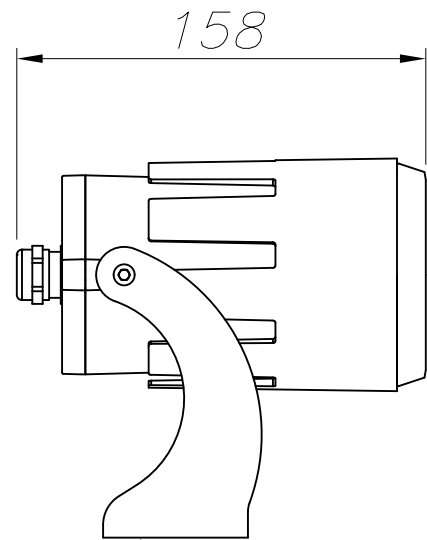

ALUMINIO
ALUMINIUM

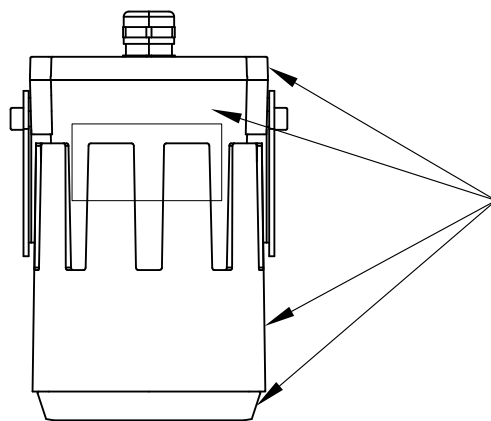

ALUMINIO INYECTADO
INJECTED ALUMINIUM

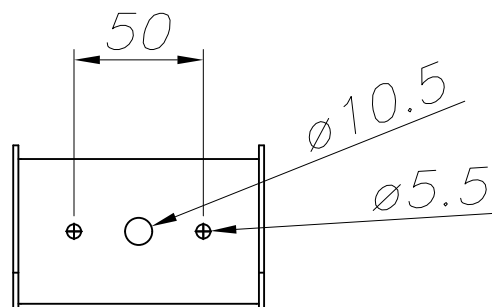

PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE

