

05-9856-34-CL


V1

POWELL Spotlight

Description

LED Spotlight for outdoor use.

With adjustable lighting positioning. Includes drainage holes on the front of the head to avoid water accumulation and maximise the light's useful life. Structure with double body design to prevent heat generated by the LED affecting the useful life of the driver. Adjustable light source. Structure material: High purity aluminium. Structure finish: Grey. Diffuser material: Glass. Diffuser finish: Transparent. UV protection. Warranty: 5 Years.

**Finish**

Grey
Transparent

Material

High purity aluminium
Glass

**TECHNICAL CHARACTERISTICS****Light source**

Light source: LED CREE
Output (W): 18W
Total power consumption (W): 23
Color temperature: Warm White - 3000K
CRI: 80
Real Lumen: 1895
Nominal Lumen: 2029
Qty Leds: 9
Lm/Real W: 82
Life Time: 50.000h L70B30
Bin / Grup: 7C1 o 7B4
MacAdam steps: 3
UGR: 10.8
Photobiological risk: RG2

GEAR

Brand: GALLOP
Gear included: Yes, electronic
Voltage / Frequency:
100-240VAC/50-60Hz
Power Factor: 0.90

Luminaire

Double cable exit: No
Drainage: No
Uv Protection: Yes
Warranty: 5 Years

Logistics

Energy Efficiency: LED A++
EAN Code: 8435381462970
Net Weight (Kg): 1.760
Weight in Kg (packaged): 2.063
Packing: 200 x 155 x 225
Masterbox: 4

The photograph may not match the reference exactly. Please read the product description to identify the finish.

OPTIONAL ACCESSORIES




71-9487-34-34V1

Structure material: Galvanized steel
Net Weight (Kg): 0.790



71-9487-Z5-Z5V1


Structure material: Galvanized steel
Net Weight (Kg): 0.790

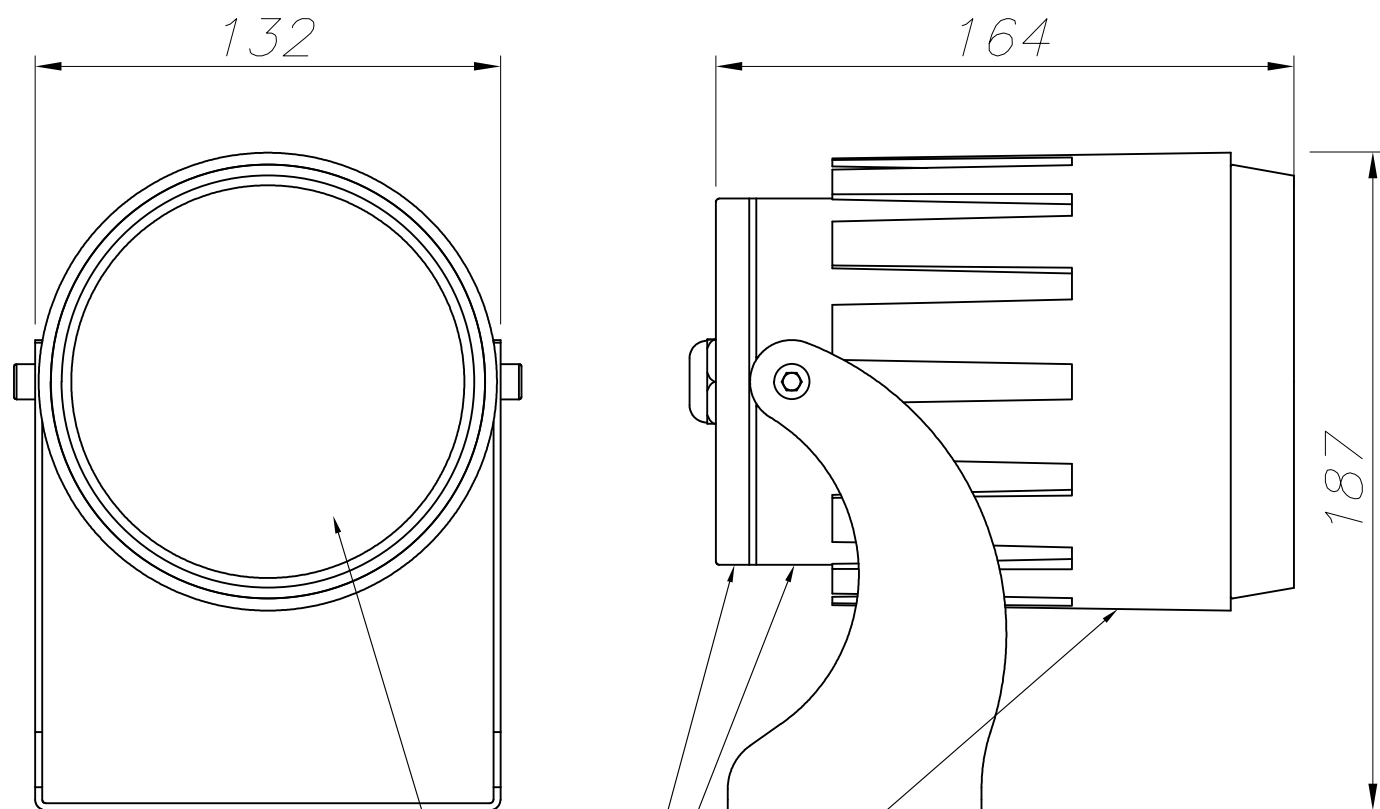

CRISTAL TRANSPARENTE
TRANSPARENT GLASS

ALUMINIO INYECTADO
INJECTED ALUMINIUM

ALUMINIO
ALUMINIUM

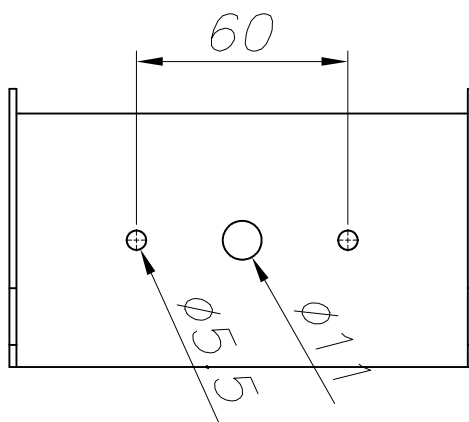

PLANTILLA DE INSTALACION
INSTALLATION TEMPLATE

